

WATER STONE – Artisan Sinks

Dan & Joanna Weaver – 115 S Gouldsboro Rd
Gouldsboro Maine 04607 – 207 963 5819

www.maine kilnworks.com — dan@maine kilnworks.com


ARCHITECTURAL STONEWARE & PORCELAIN



Drain Mounting Instruction — For Sinks Without Overflow

All of our sink styles & sizes accept all standard 1¼ inch diameter bath sink drains — drain fixtures supplied for bath sinks with overflow and those supplied for bath sinks without overflow.

Drain fixtures are made with different thread take-up lengths and bath sinks are made with different sink bowl thicknesses where the drain is secured to the sink.

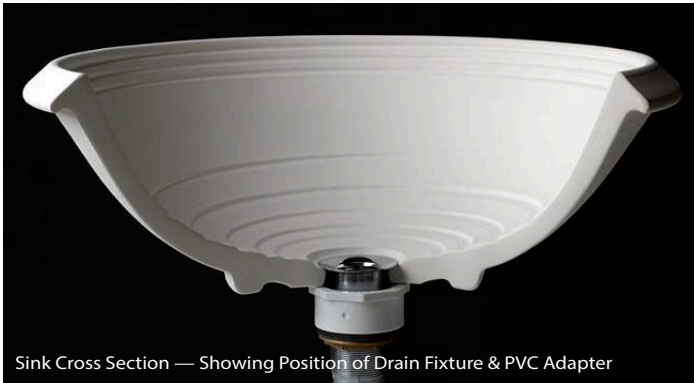

Sink Cross Section — Showing Position of Drain Fixture & PVC Adapter

With your sink shipment we have enclosed a white PVC drain adapter (and sealing washer) which you may use to increase our sink outlet thickness to match the threaded take-up length of your drain fitting. You will only need to use this adapter if the threaded length of your drain is too short to secure the drain to our sink.

Your drain fixture set will come with one sealing washer. Our white PVC adapter is supplied with a second black rubber washer to seal the nut side of the adapter as illustrated.

You may use silicone sealant or plumber's putty to make a water tight joint between the sink and the white PVC adapter or use the rubber seal supplied with the drain fixture. Silicone sealant on both adapter sealing surfaces will guarantee a water tight joint.




Sink Drain Fixture — With PVC Adapter In Place

The PVC drain adapter is installed as indicated in the cross section photos (at left and below) and as positioned on the example drain above. The underside of the sink drain flange (which faces the sink user) should be sealed with plumber's putty.

The sink photo cross sections illustrate the relative positions of the bath drain fixture and white PVC adapter at the sink outlet. The PVC drain adapter is used to cover the drain overflow outlets making a water tight joint between drain and sink.

Your complete bathroom sink fixture set is typically supplied with all drain fitting hardware – or alternatively – you may purchase drain fixture fittings separately if or as required.

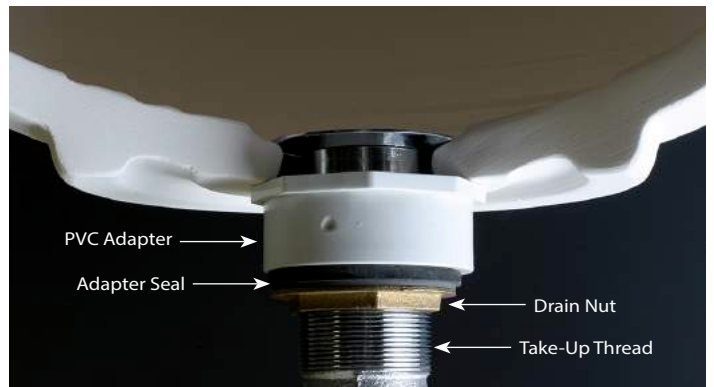

Vessel sink drains for sinks without overflow are available through plumbing suppliers or you may use the more commonly stocked drain that has a built in overflow. The enclosed overflow adapter will allow you to use either drain fixture style with equal ease.

Please call — 207 963 5819 — if you have any questions regarding the installation of your sink or drain fittings. We would be happy to talk with you or your contractor to clarify any installation question or concerns.